

SFS


Center Point System

Integrated setting aid for quick and
easy installation of façade panels

The Center Point System

Perfectly set without pre-drilling

With the Center Point System, the installation of rainscreen façades is super easy. The pre-fitted centring sleeve, drill tip and special thread geometry ensure perfect positioning of the fastener to the façade panel. Thanks to the patented thread, the fastener is protected from potential overdriving issues resulting in a secure installation.

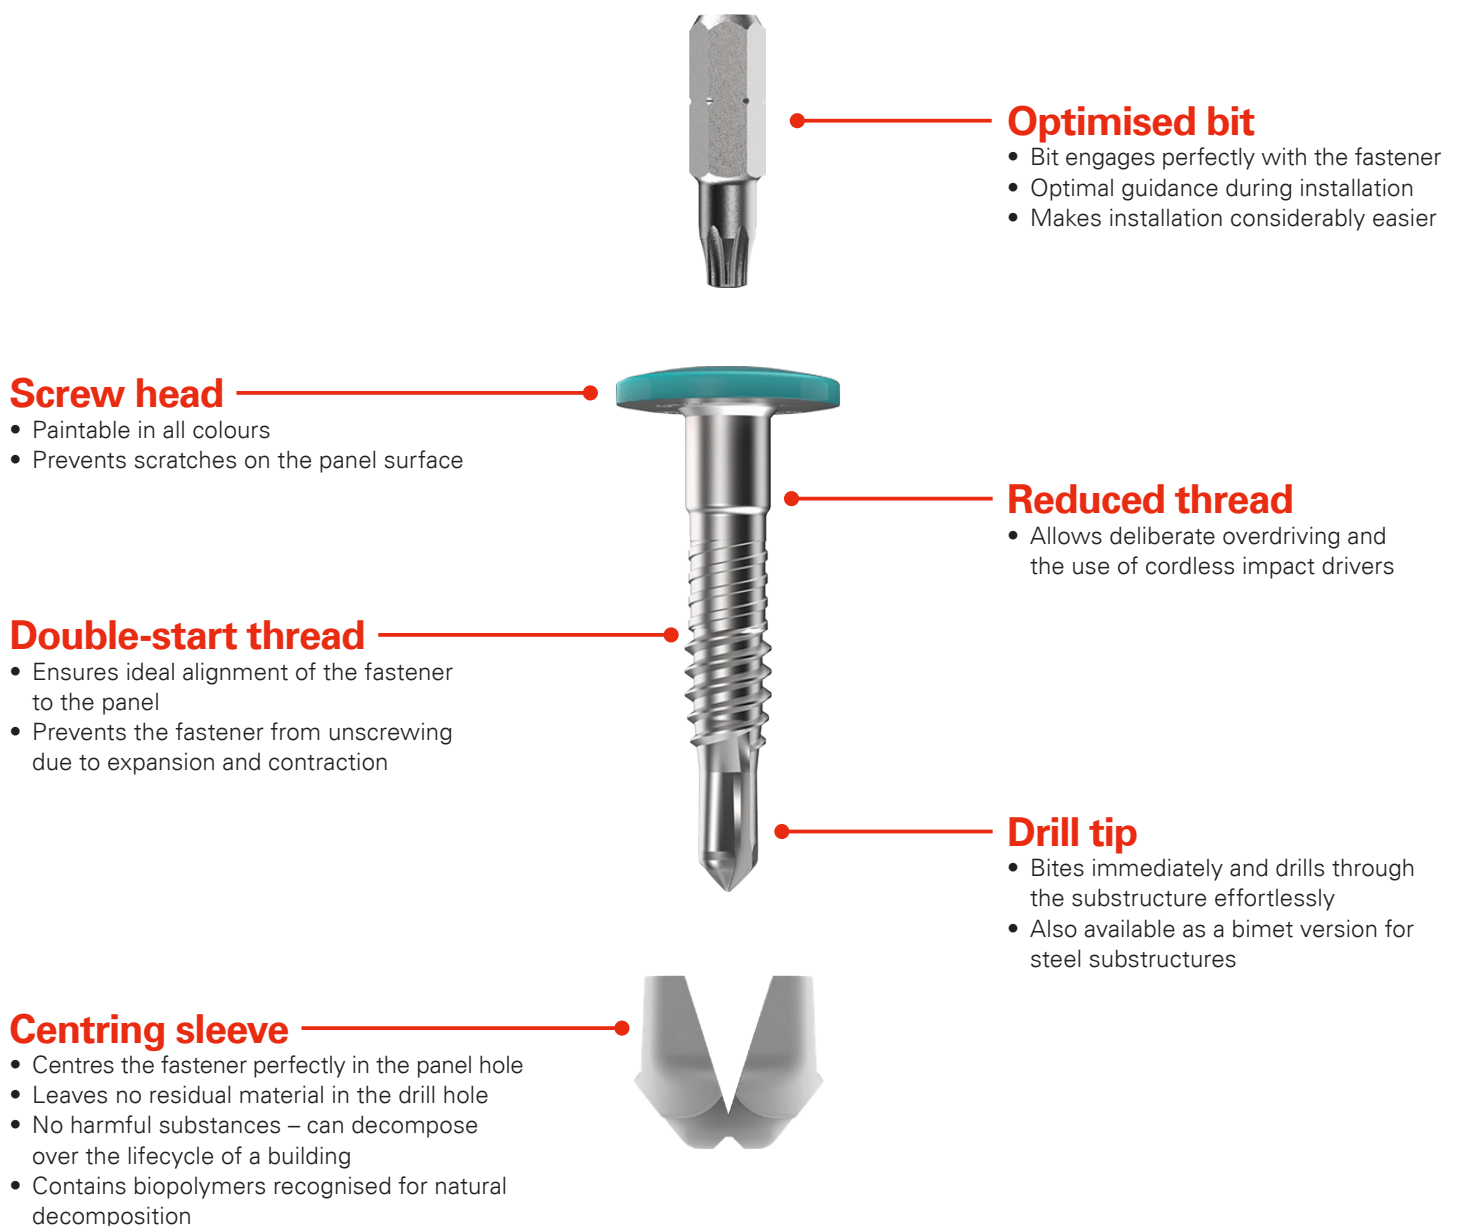

Patented complete system

Twice as fast as before

Perfectly set in one step

It doesn't get any simpler: Thanks to the new centring sleeve and the many advantages of the fastener, installing façade panels is always right first time. Fastening is done swiftly, in one step and without a special tool. You save time and avoid the nuisance of poorly set fasteners.

For beautiful, long-lasting façades

Façade panels expand and contract due to temperature fluctuations. This can often lead to unsightly damage at the fastening points, which can be expensive to put right. The Center Point System prevents this damage in two ways: First no material from the centring sleeve remains in the drill hole, which allows full expansion and contraction. Second the conical shape of the head prevents it from scratching the panels when they move.

Unbelievably fast

With the new Center Point System, you work more than twice as fast as with a conventional façade rivet.

Several styling possibilities



Now you can choose between an uncountable amount colors for your screw head and there are even more possible textures.

Centering sleeve

New earth-friendly sleeve

With our new eco friendly sleeve, there is no obstacle in using the Center Point System anymore. The Centering Sleeve is made of biopolymers that are recognised for their natural decomposition properties. Thanks to the Centering Sleeve, pre-drilling is no longer necessary, leading to significant cost and time savings.


Waste-handling recommendations may vary by country and local regulations. Please always check and follow the guidance of your local market.

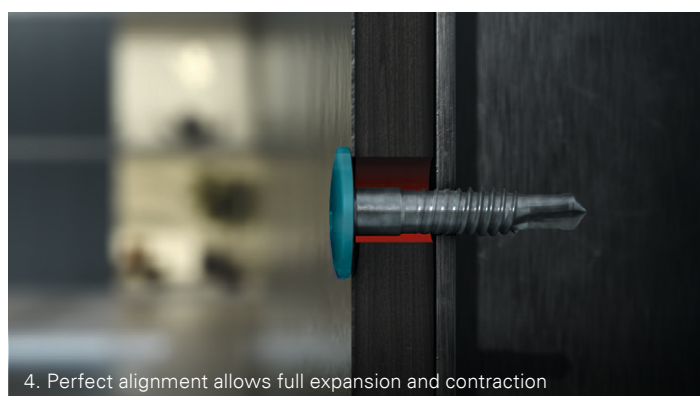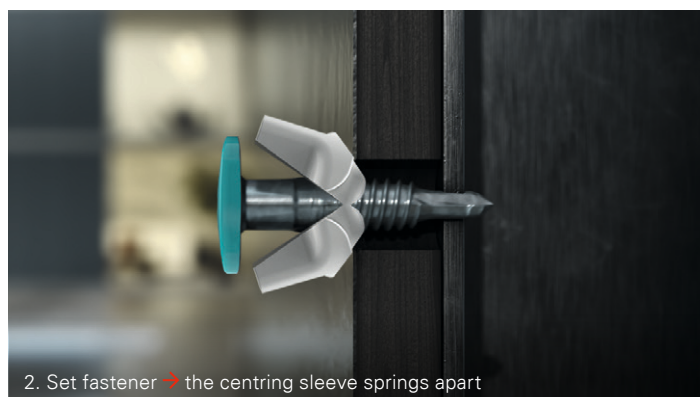

Fastener

Description	Panel thickness mm	Pre-drilled panel hole Ø mm	Clamping length mm	Aluminium thickness mm	Steel thickness mm	
SDA4-D15-CSB10/6-5,8×25-A4	6,0	10,0	7,8–9,0	1,8–3,0	–	
SDA4-D15-CSB10/8-5,8×29-A4"	8,0		9,8–11,0			
SDA4-D15-CSB10/10-5,8×33-A4	10,0		11,8–13,0			
SDA4-D15-CSB10/13-5,8×38-A4	12,0–13,0		13,8–16,0			
SX4-D15-CSB10/6-5,8×25-A4	6,0	10,0	7,0–9,0	1,8–3,0	1,0–2,0	
SX4-D15-CSB10/8-5,8×29-A4*	8,0		9,0–11,0			
SX4-D15-CSB10/10-5,8×33-A4	10,0		11,0–13,0			
SX4-D15-CSB10/13-5,8×38-A4	12,0–13,0		13,0–16,0			

*Available in stainless steel A2 version
The fasteners are supplied with a suitable bit.

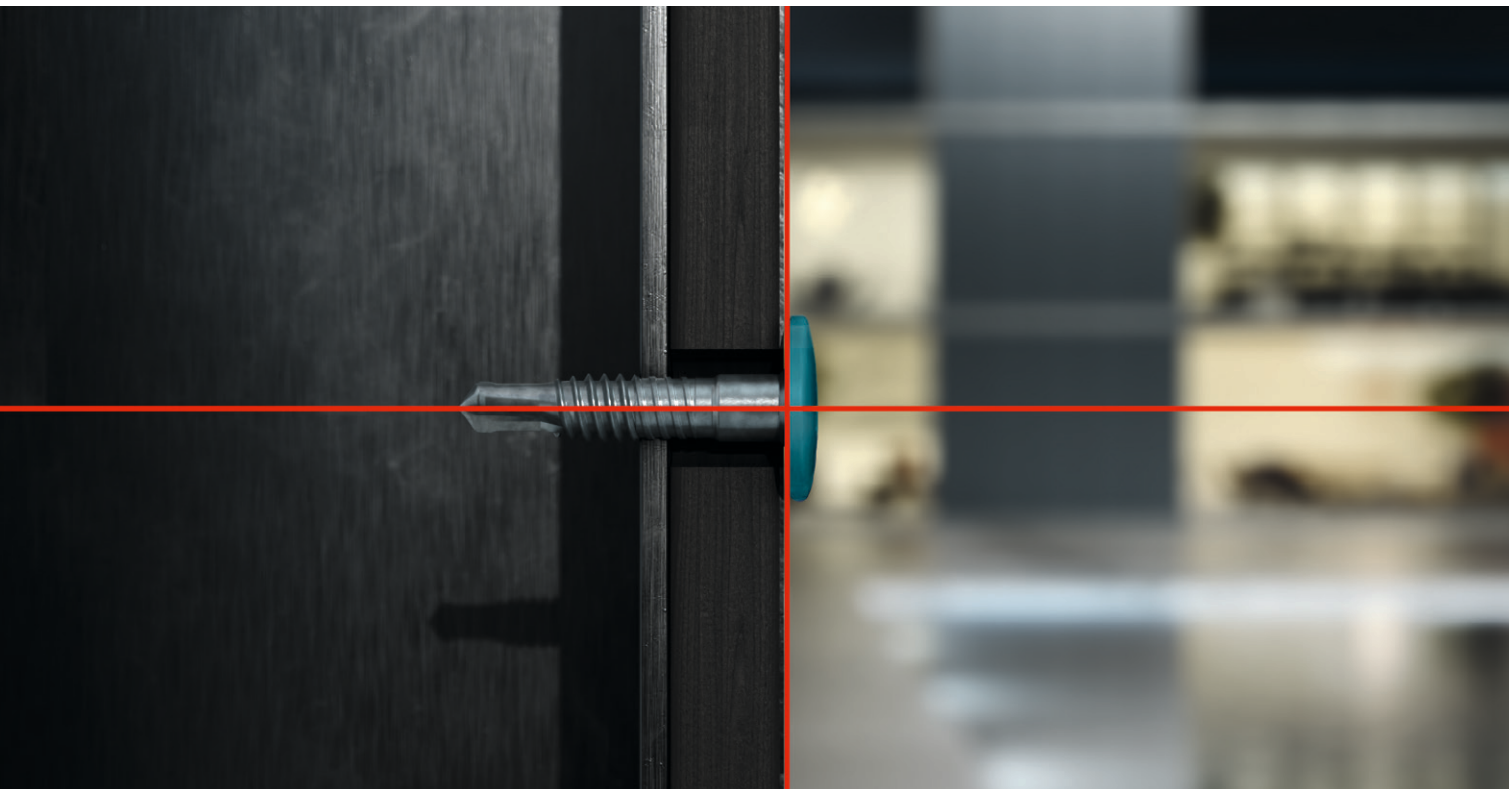

Accessories

Description	Application	
FP-S-10.0×6-6.0	Fixed point sleeves in stainless steel A2	
GP-S-10.0×6-6.0	Sliding point sleeves in stainless steel A2	
GP-H-10,0-CPS	Impact tool for aligning and setting the sliding point sleeve	
VHM-10.0×80	For pre-drilling the façade panels Ø10.0 mm	
T25W-25-HEX-¼"	Bit	
Bit holder ZA¼"	Universal bit holder	

